


MADE IN ITALY



Textile  
Composites  
Leather

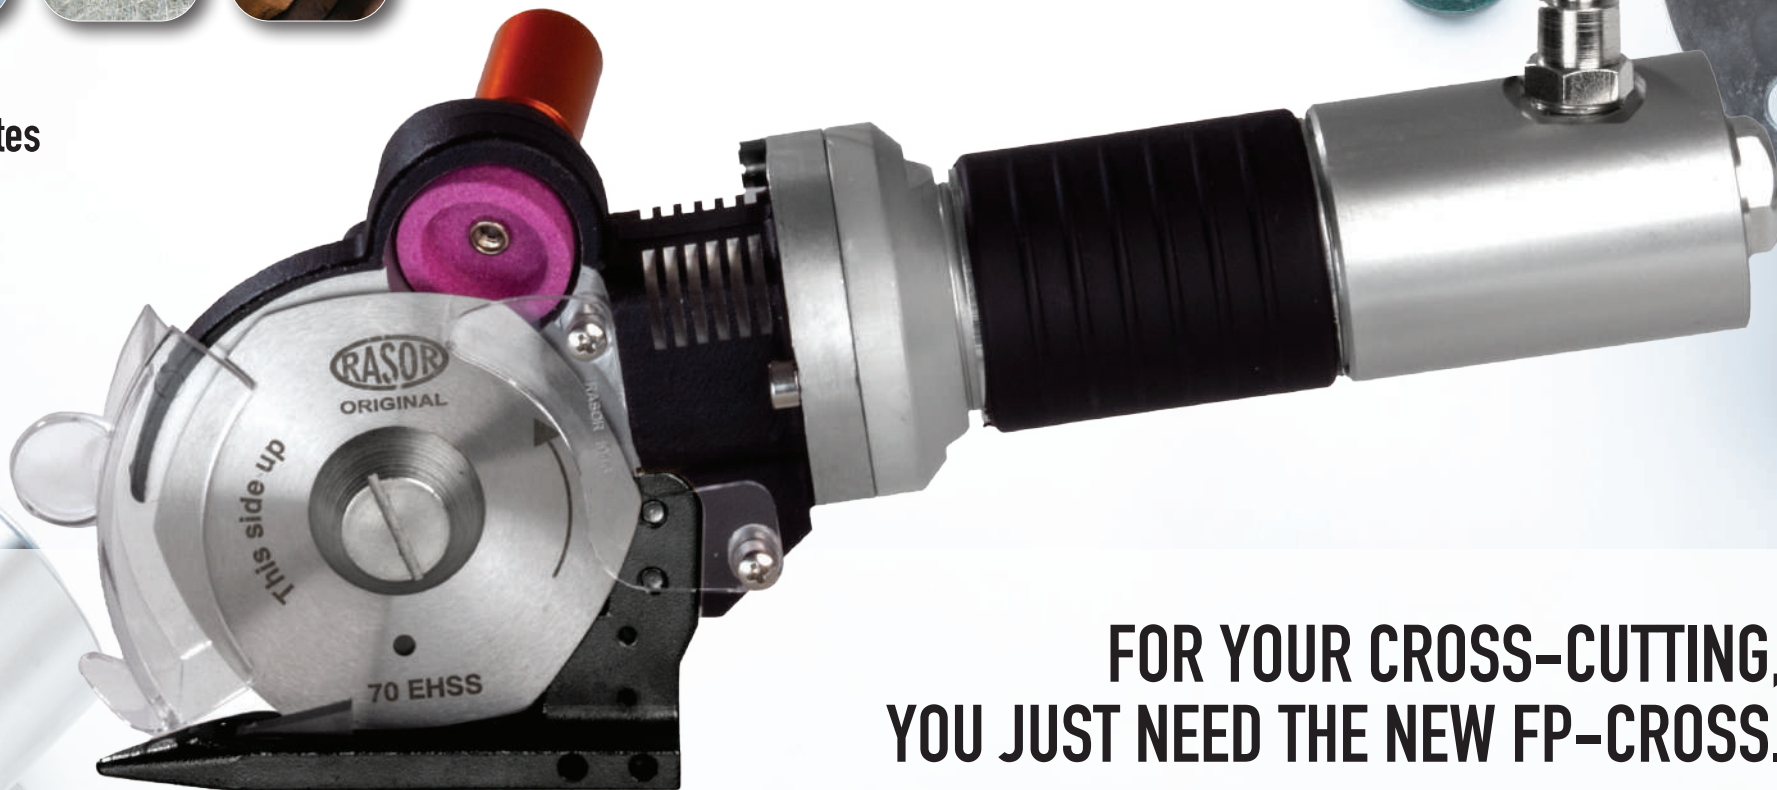

FOR YOUR CROSS-CUTTING,  
YOU JUST NEED THE NEW FP-CROSS.

# FP-CROSS A TECHNICAL STEP FORWARD

The smallest pneumatic cross-cut O.E.M. cutting unit ever produced



1946



### WHAT'S NEW:

- Turbine
- Small size
- Horizontal construction
- Fast Cross-cut features
- Rear exhaust air system


### FOLLOW US:



### RASOR ELETTRMECCANICA SRL

Via Giannetto Mattei 41/43  
20044 Arese (MI) · Italy  
ph. +39 02 66 22 12 31  
info@rasor-cutters.com


www.rasor-cutters.com

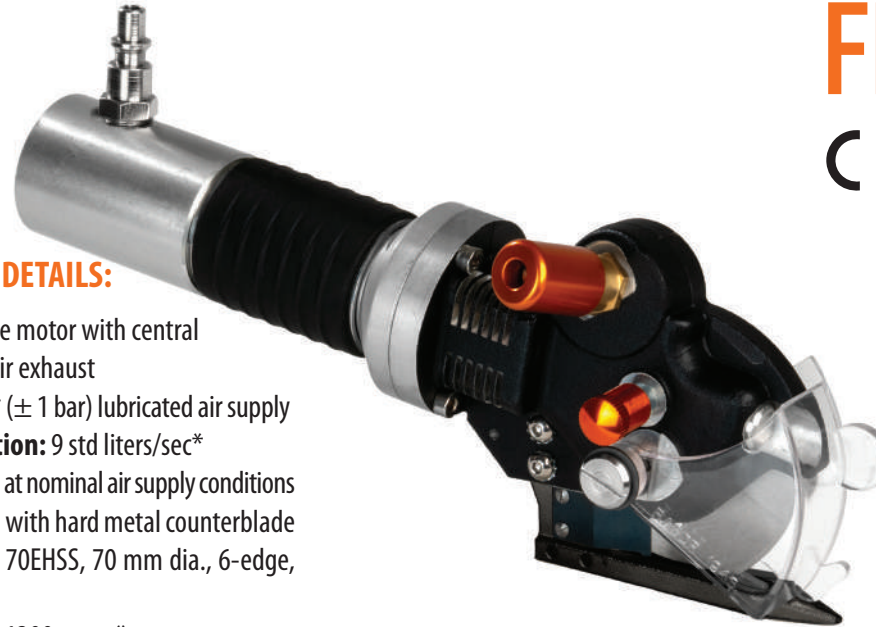

### TECHNICAL DETAILS:


- Muffled turbine motor with central back-located air exhaust
- 6 bar nominal\* ( $\pm 1$  bar) lubricated air supply
- Air consumption:** 9 std liters/sec\*
- Power:** 380 W at nominal air supply conditions
- Blade:** 70 mm with hard metal counterblade
- Blade descr.:** 70EHSS, 70 mm dia., 6-edge, HSS steel
- Blade speed:** 1300 r.p.m.\*
- Cutting ability:** up to 20 mm
- Sound pressure:** 72 dBe (EN ISO 15744)\*
- Vibration Level:** 1,36 m/sec<sup>2</sup> (ISO 8662)\*
- Net weight:** 920 g
- Total weight (with packing):** 1750 g
- Temperature range:** 0 – 55 C
- Umidity range:** 10 – 95% without condensate

\*The reported data are collected at a pressure of 6 bar (ISO 2787: 1984), recommended operating pressure.

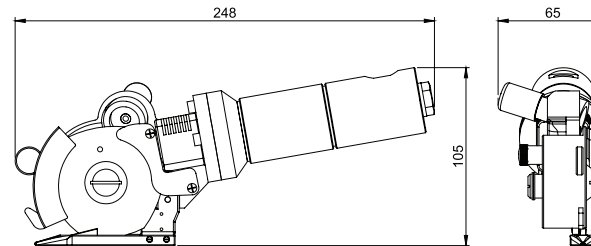

Dimension layout

# FP-CROSS



Ø 8 mm



Ø 8 mm

Minimum recommended



Rasor recommend to use only dry air lubricated with special Rasor VG 10 pneumatic oil



Sharpening device.



Ideally placed air outlet O.E.M.



### BLADES AVAILABLE:

**70SHSS**, 70 mm 4-edges, HSS steel | **70EHSS**, 70 mm 6-edges, HSS steel | **70CHSS**, 70 mm circular, HSS steel | **70DHSS**, 70 mm 10-edges, HSS steel | **70SHSSTF**, 70 mm 4-edges, HSS steel Teflon<sup>®</sup> coated | **70EHSSTF**, 70 mm 6-edges, HSS steel Teflon<sup>®</sup> coated | **70EMD**, 70 mm 6-edges, Carbide (Widia<sup>®</sup>) | **70DHSSTN**, 70 mm 10-edges, HSS steel Titanium coated | **70DHSSTF**, 70 mm 10-edges, HSS steel Teflon<sup>®</sup> coated